


Features

- Support Customized Output Current
- Constant Voltage Output
- High Efficiency (Up to 90%)
- IP54
- All-Around Protection: SCP, and Anti-reverse Protection
- Non Isolated and Share the same Ground

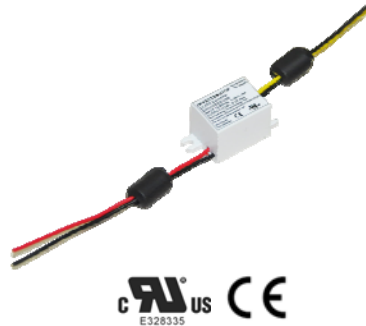

Description

The DHV-003S012SS operates from a 14~ 60 Vdc input range. It is designed to be highly efficient and reliable. Features include short circuit, anti-reverse and over load protections.

Model List

Output Current	Input Voltage Range	Output Voltage	Max. Output Power	Efficiency (1)	Model Number
200 mA	14~ 60 Vdc	12 V	2.4 W	90%	DHV-003S012SS

Note: (1) Measured in 14Vdc input at full load.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage Range	14 Vdc	-	60 Vdc	
Input DC Current	-	-	0.2 A	Measured at full load

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Voltage	-	12 V	-	
Output Voltage Tolerance	-5%	-	5%	
Output Current Range	0 A	-	0.2 A	
Output Voltage Ripple			480 mV	Measured at full load
Line Regulation	-	-	±5%	
Load Regulation	-	-	±5%	
Turn-on Delay Time	-	0.5 s	1.0 s	Measured at @14 Vdc input

Note: All specifications are typical at 25 °C unless otherwise stated.

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Казахстан (772)734-952-31

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Current Protection	-	-	1200mA	Measured at @14 Vdc input
Short Circuit Protection	Hiccup. The power supply shall be self-recovery when the fault condition is removed.			

General Specifications


Parameter	Min.	Typ.	Max.	Notes
Efficiency	84%	87%	-	Measured at full load @30 Vdc
No Load Power Dissipation	-	-	0.1 W	
MTBF	-	1,778,000 Hours	-	Measured at 60Vdc input, 100%load and 25°C ambient temperature (MIL-HDBK-217F)
Life Time	-	119,300 Hours	-	Measured at 60Vdc input, 100%load and 60°C Case temperature ; See life time vs. Tc curve for the details
Dimensions Inches (LxW x H) Millimeters (LxW x H)	1.06x 0.83 x 0.71 27x 21x18			
Net Weight		20 g		

Note: All specifications are typical at 25 °C unless otherwise stated.


Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes
Operating Temperature	-35°C	-	+70 °C	Humidity: 10% RH to 90% RH. See Derating Curve for more details
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 90% RH


Derating Curve

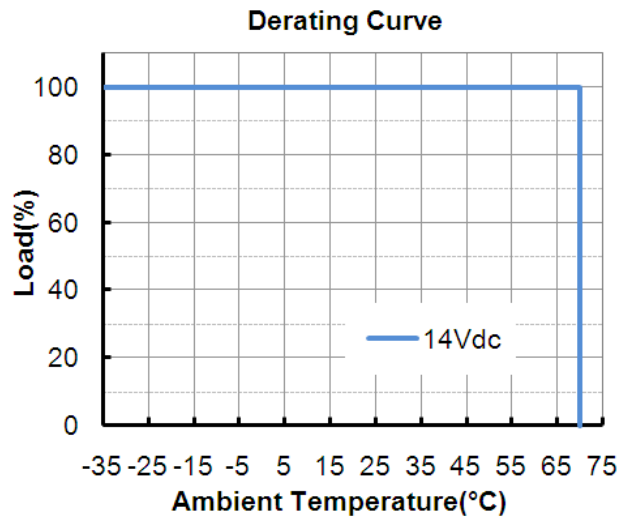


Life Time vs. Case Temperature Curve

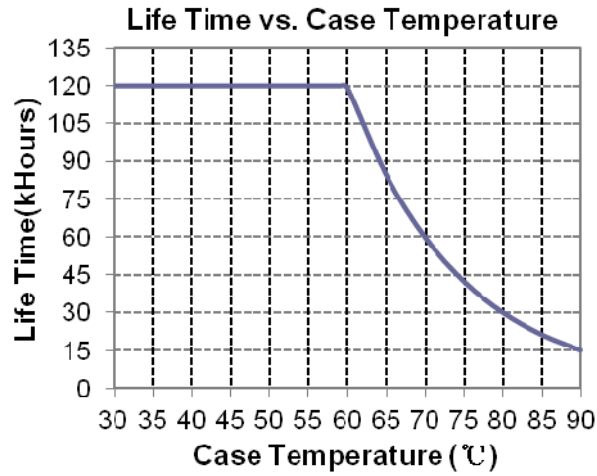


Efficiency vs. Output Voltage Curve

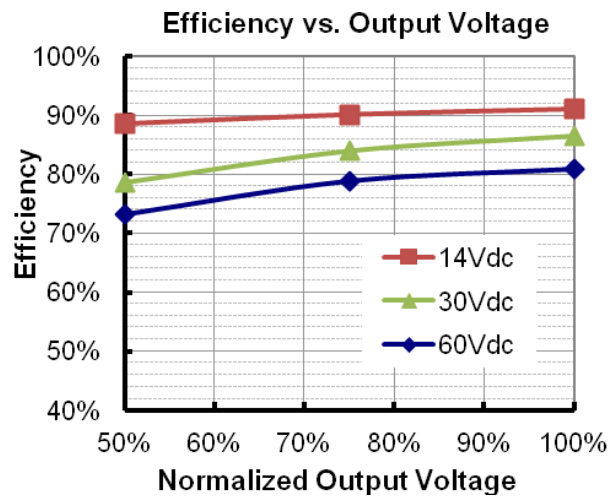

Input and Output Implementation

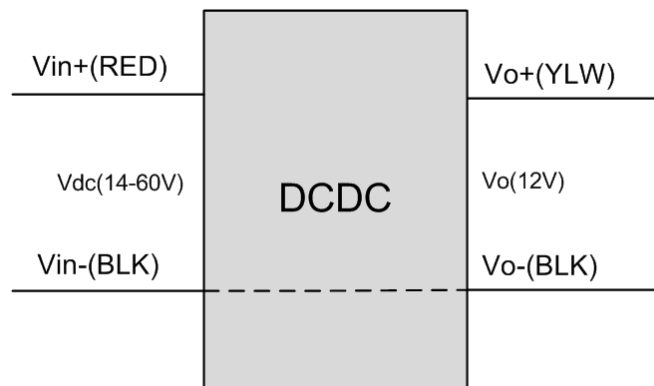

Mechanical Outline

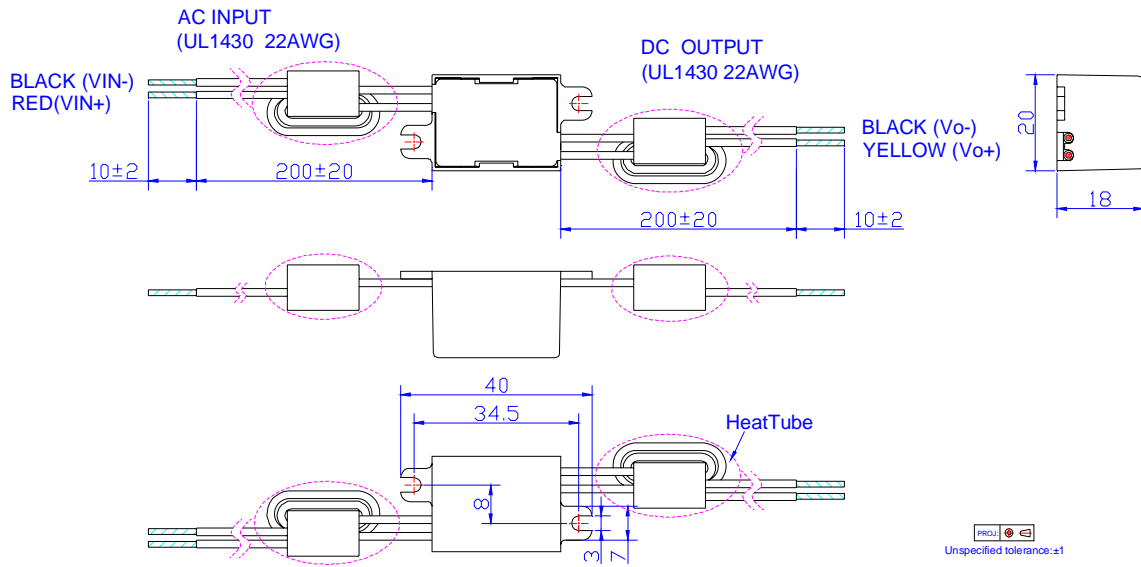

RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2012-07-27	A	Datasheet Release	/	/
2012-10-18	B	Typical MTBF and Life time Value	/	Added
		Life time Curve	/	Updated
2012-11-23	C	Input-output Implementation	/	Added
		One feature-Shares the same GND	/	Added
		Mechanical Outline	/	Updated
2013-04-01	D	UL Certificate	/	Added
		Life time	223,600 Hours @60°C Tc	119,300 Hours @60°C Tc
		Life time curve	/	Updated
		Product Picture	/	Updated
		Mechanical Outline	/	Updated
2013-08-28	E	IP Grade-IP54	/	Added

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Казахстан (772)734-952-31

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Таджикистан (992)427-82-92-69

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93